


side view

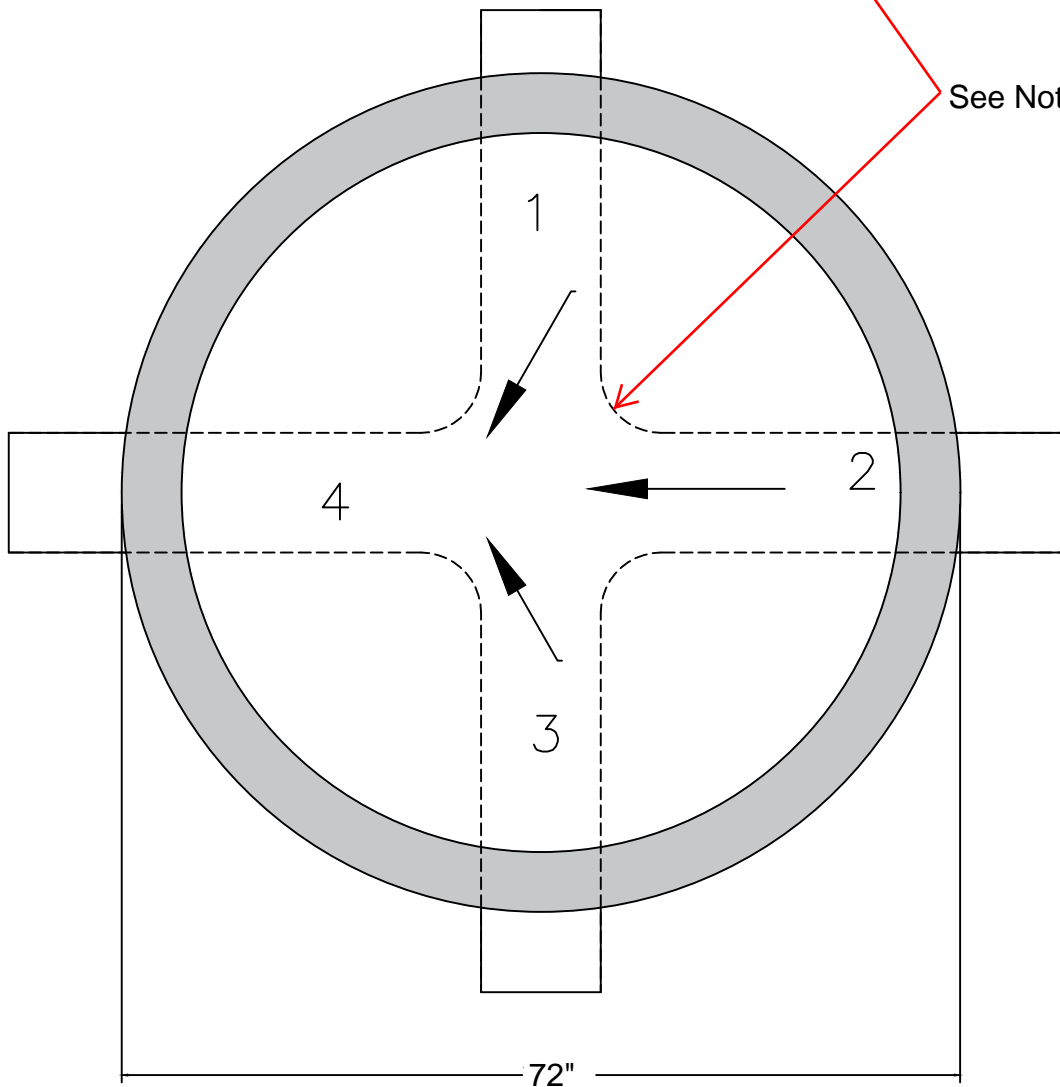

See Note 7

Top view

**NOTES:**

1. Conforms to ASTM C478.
2. Concrete Strength: 4000 PSI at 28 days.
3. All measurements are in inches.
4. Max cored hole penetration is 36".
5. Model number changes per penetration. (1-4)
6. Trelleborg pipe seals provided for pipe penetrations. See attached document.
7. Channels poured secondary at precast facility. If Necessary
8. Epoxy lined available upon request.

**MODEL NUMBER: CP6042MHB**

**WEIGHT: 6,000lbs**

\* for more information, please contact Code Precast. Design subject to change.