


side view

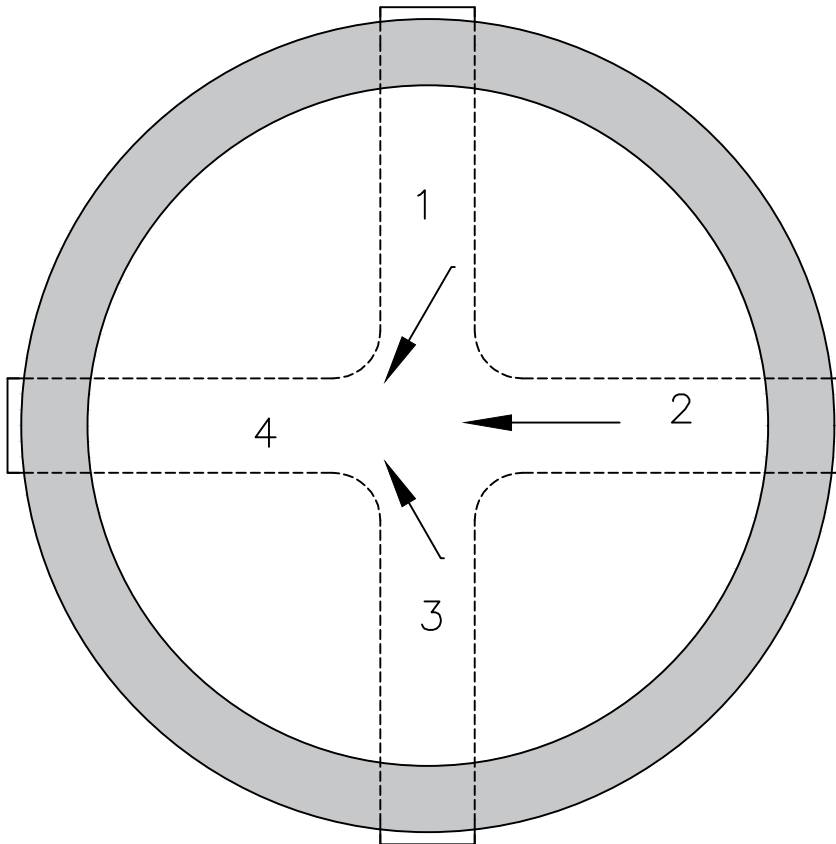

top view

NOTES:

1. Conforms to ASTM C478.
2. Concrete Strength: 4000 PSI at 28 days.
3. All measurements are in inches.
4. Max cored hole penetration is 60”.
5. Model number changes per penetration. (1-4)
6. Trelleborg pipe seals provided for pipe penetrations. See attached document.
7. Channels poured secondary at precast facility.
8. Epoxy lined available upon request.

MODEL NUMBER: CP7260MHB

WEIGHT: Varies

* for more information, please contact Code Precast. Design subject to change.